


The logo for 'Pro one' is displayed within a dark blue hexagonal shape. The word 'Pro' is in green and 'one' is in white, both in a bold, sans-serif font. A registered trademark symbol (®) is located to the upper right of the 'o' in 'Pro'.

**Pro[®]
one**

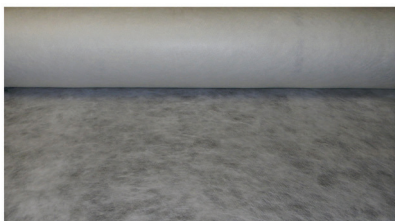

Géotextile non-tissée 150g

Caractéristiques

- **Structure et forme:** non-tissé aiguilleté, 100% fibres en polypropylène
- **Masse surfacique:** 150 g/m² EN ISO 9864
- **Epaisseur:** 1.70 mm EN ISO 9863-1
- **Résistance à la traction:**
 - SP 10 kN/m EN ISO 10319
 - ST 10 kN/m EN ISO 10319
- **Déformation à l'effort de traction maximale:**
 - SP 50 % EN ISO 10319
 - ST 60 % EN ISO 10319
- **Résistance à la perforation dynamique:** 23 mm EN ISO 13433
- **CBR Résistance au poinçonnement statique:** 1.6 kN EN ISO 12236
- **Perméabilité normale au plan:** 90 l/m²*s EN ISO 11058
- **Emballage (rouleaux):**
 - Largeur: 1 / 2 / 3 / 4 / 5 / 6 m
 - Longueur: 150 m
 - Diamètre du rouleaux: ca. 50 cm